

BSD-IGS-0208GSFP Series

10-port Unmanaged Industrial Ethernet Switch, with 2-port 1000Base-F(x) and 8-port 10/100/1000Base-T(x)

Features



- Support 2 1000Base-F(x) and 8 10/100/1000Base-T(x) Ethernet ports.
- Support IEEE802.3, IEEE802.3u, IEEE802.3x.
- Plug-and-play, 10/100/1000M, F/H duplex, MDI/MDI-X auto negotiation.
- Industrial lightning chip design, up to 8KV effective against lightning, avoiding electrostatic induction.
- Redundant 10-58VDC power input, reverse connection protection.
- Industrial grade design, -40-85°C work temperature.
- IP40 protection grade, DIN rail mounted.

Introduction


BSD-IGS-0208GSFP series are a smart plug-and-play industrial Ethernet switch, which can provide economical solution for your Ethernet. Its dustproof fully sealed structure (IP40 protection grade), over-current, over-voltage and EMC protected, redundant double power input as well as built-in intelligent alarm design can help system main tenancy personnel monitor the network operation, which can work reliably in harsh and dangerous environment.

BSD-IGS-0208GSFP supports 2 port 1000Base-F(x) and 8 port 10/100/1000Base-T(X), Full/Half duplex mode, and auto MDI/MDI-X connection. It support CE, FCC, RoHS standard, rugged high-strength metal case, power supply input (10-58VDC). The switch support IEEE802.3/ IEEE802.3u/ IEEE802.3x with 10/100/1000M, full/half-duplex, and MDI/MDI-X auto-sensing, the -40~85°C working temperature, can meet all kinds of Industrial environment requirement, providing reliable and economic solution for your industrial Ethernet network.

Specification

Protocol Standard	Standard: Support IEEE802.3, IEEE802.3u, IEEE802.3x		
	Flow control: IEEE802.3x flow control, back press flow control		
Performance	Forwarding Rate: 14.88Mpps		
	Transmission Mode: Store and Forward		
	Cache Size: 2M		
	Backplane Bandwidth: 20Gbps		
	MAC: 16K		
	Delay Time: < 5μs		
Ethernet Port	10Base-T/100Base-TX/1000Base-TX Self-adaption, Half/full duplex and MDI/MDI-X auto detect		
Fiber Port	1000Base-X SFP slot		
Indicator	Power Indicator	PWR	
	Port Indicator	LINK / ACT	
Power Supply	Input Voltage	DC24V 1A (DC10-58V)	
	Connector	6 bit 5.08mm Removable terminal block	
	No-load Consumption	<4W	
	Protection Mechanism	Overload Protection / Reverse Connection Protection / Redundancy Protection	
	Casing: Aluminum-alloy Case		
Mechanical	IP Grade: IP40 protection		
	Dimension: 143*104*48mm(L*W*H)		
	Weight: 500g		
	Installation: DIN-rail mounting, wall mounting		
	Operating Temperature: -40 to 85°C		
Environmental	Storage Temperature: -40 to 85°C		
	Ambient Relative Humidity: 5% to 95% (non-condensing)		
	CE, FCC, RoHS		
Industry Standards	Safety	UL508	
	EMI	FCC CFR47 Part 15, EN55022/CISPR22, Class A	
	EMS	IEC61000-4-2(ESD) ±8kV(contact), ±15kV(air)	
		IEC61000-4-3(RS) 10V/m(80MHz-2GHz)	
		IEC61000-4-4(EFT) Power Port: ±4kV, Data Port: ±2kV	
		IEC61000-4-5(Surge) Power Port: ±2kV/DM, ±4kV/CM, Data Port: ±2kV	
		IEC61000-4-6(CS) 3V(10kHz-150kHz), 10V(150kHz-80MHz)	
	Machinery	IEC60068-2-6 (Vibration)	
		IEC60068-2-27 (Shock)	
IEC60068-2-32 (Free Fall)			
Warranty	5-years		

Dimension

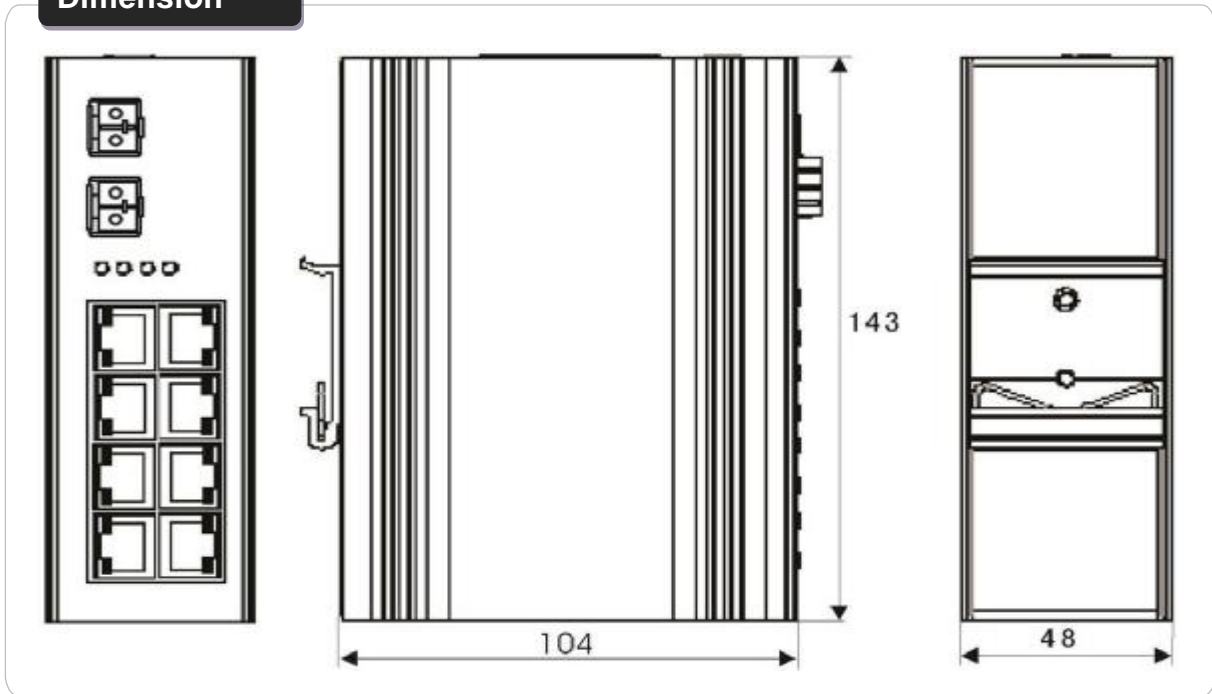

Order Information

Model No.	Description of Goods
BSD-IGS-0208GSFP	2*1000M SFP Slot + 8*10/100/1000M RJ45 Port, DIN-Rail, DC10-58V