

BSD-MIGS0208GSFP Series

10-port Managed Industrial Ethernet Switch, with 2 1000Base-X SFP Slot and 8 10/100/1000Base-T(X) Ethernet Port

Features



- Support 2 1000Base-X SFP slot and 8 10/100/1000Base-T(X) Ethernet port.
- Support G.8032(ERPS), IEEE802.3, IEEE802.3u, IEEE802.3z, IEEE802.3x, IEEE802.3ad, IEEE802.3ab, IEEE802.1p, IEEE802.1x, IEEE802.1Q, IGMP Snooping, IPv4/IPv6 precedence.
- Support CLI, SNMP, WEB management, Console/Telnet command-line management and syslog, using self-developed ring network technology, recovery time <20ms.
- DC12-58V redundancy power, reverse polarity protection.
- Industrial grade 4 design, -40-85°C operating temperature.
- IP40 rated aluminum alloy housing, DIN-Rail mounted.

Introduction


BSD-MIGS0208GSFP is a high performance, cost-effective high-end managed industrial Ethernet switch. The switch provides 8 10/100/1000Base-T(X) Ethernet port and 2 1000Base-X SFP slot. The use of a Ring technology (network fault recovery <20ms) the user can easily set the redundant ring network to increase network reliability, it also supports WEB, CLI, Telnet/serial console, Windows utility, and SNMP management of a variety of ways, rich QoS features for data traffic control and management, support ring protocol, RSTP and STP Ethernet redundancy support port-based VLAN, IEEE 802.1Q VLAN and GVRP protocol. The product also industrial design, and can be widely used in automotive PIS, CCTV, video surveillance systems, train control system, but also applies to any vibration shock, EMC compatibility requirements of harsh industrial applications, can meet a variety of industrial site requirements to achieve higher reliability.

Specification

Protocol Standard	G.8032(ERPS), IEEE802.3, IEEE802.3u, IEEE802.3z, IEEE802.3x, IEEE802.3ad, IEEE802.3ab, IEEE802.1p, IEEE802.1x, IEEE802.1Q, IGMP Snooping, IPv4/IPv6 precedence
Switching Performance	Forwarding Rate: 26.7Mpps Transmission Mode: Store and Forward Packet Buffer Size: 12M Backplane Bandwidth: 40Gbps MAC Table Size: 16K Priority Queues: 8 Delay Time: < 10μs
Ring Network Management	Bandwidth Management: outbound port speed, speed limit particle size: 0 - 1G, step 100kbps.
	Expanding Ring Back: based on port, support link aggregation/LACP, support load balancing, support port protection, Spanning Tree Protocol: STP, RSTP, MSTP.
	System Upgrade: support under BOOTROM Xmodem/TFTP upgrade, support for system files and upload and upgrade configuration files.
	User Management: hierarchical user and password protection, port septum away, broken fiber alarm, power failure alarm.
	System Maintenance: the optical module diagnostics, ping, port system count, support ERPS, ring protection switching time<20ms, with QOS traffic classification, priority level of trust, SP, WRR queue scheduling, support streaming strategies, suppression, support SNMP network pipe, support CLI/SNMP/WEB management, support Console and Telnet command line management, and syslog
Ethernet Port	10/100/1000Base-T(X) auto speed control, full/half duplex and MDI/MDI-X auto-adaptation
Fiber Port	1000Base-X SFP slot
LED Indicator	Power Indicator: PWR
	Port Indicator: LINK / ACT
Power Supply	Input Voltage: DC12-58V Connector: 6 bit 5.08mm removable terminal block Full Load: <10W
	Protection Mechanism: overload protection, reverse connection protection, redundancy protection
Mechanical Structure	Shell: IP40 protection, aluminum alloy housing
	Dimension: 143*104*48mm(L*W*H)
	Weight: 500g Installation: DIN-Rail mounting, wall mounting
Operating Environment	Operating Temperature: -40-85°C
	Storage Temperature: -40-85°C

	Ambient Relative Humidity: 5%-95% (non-condensing)
Industry Standards	EMI:FCC Part 15 Subpart B Class A, EN 55022 Class A EMS:EN61000-4-2 (ESD), Level 4 at 15kV(Air), 8kV(Contact) EN61000-4-3 (R/S), Level 3 at 10V/m EN61000-4-4 (EFT), Level 4 at 4kV(Power Port), 2kV(Date Port) IEC 61000-4-5 Level 3 (6KV/6KV) (10/700us) EN61000-4-6 (CS), Level 3 at 10V/m EN61000-4-8, Level 5 at 100A/m Shock:IEC 60068-2-27 Free Fall:IEC 60068-2-32 Vibration:IEC 60068-2-6
Certification	CE, FCC, RoHS
MTBF	>100,000 Hours
Warranty	5-years

Dimension

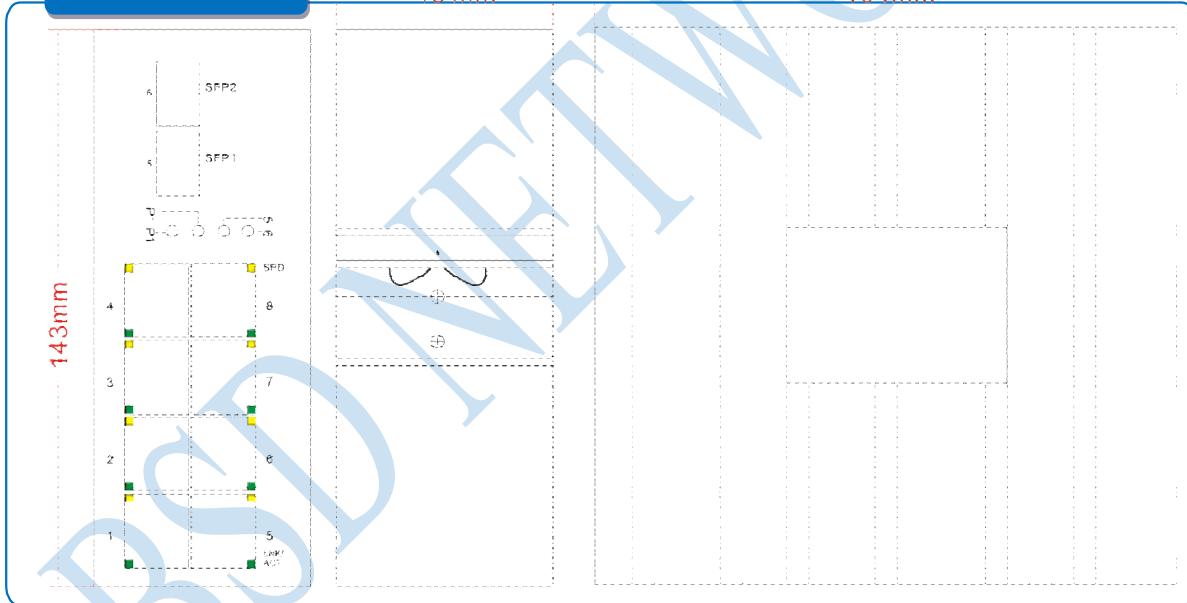

Order Information

Model No.	Description of Goods
BSD-MIGS0208GSFP	Managed Industrial Ethernet Switch, 2 1000Base-X SFP Slot and 8 10/100/1000Base-T(X), DIN-Rail, DC12-58V, -40-85° C Operating Temperature
Power Supply: DC24V DIN-Rail Power Supply or Power Adapter is Optional.	