

BSD-IGS-3408GSFP

MAIN FEATURES



4*1000Base-X, 8*10/100/1000Base-X

Industrial Ethernet Switches

Input Voltage: DC10~58V

Operating Temperature: -40°C ~ +75°C

Shell: IP40 protection, fanless design

Test Report: CCC, RoHS, FCC, CE

Anti-static: 8KV-15KV

PRODUCT DESCRIPTION

This device is 4* 1000Base-X & 8*10/100/1000Base-X Industrial Ethernet Switches. Through the fanless heat dissipation circuit design, wide range of working environment temperature, high protection level and other technologies, it provides excellent industrial quality with high/low temperature resistance and lightning protection, and enhances the reliability and safety of industrial networks. It can better meet the deployment requirements of rail transit, safe city, intelligent transportation, outdoor monitoring and other harsh environments.

PRODUCT PARAMETERS


Provider Mode Ports	
Fixed port	4*1000 Base-X, 8*10/100/1000Base-T
Power interface	Phoenix terminal, redundant dual power supply
LED Indicators	PWR, OPT, NMC, ALM
Cable Type & Transmission Distance	
Twisted-pair	0-100m (CAT5e,CAT6)
Monomode optical fiber	20/40/60/80/100KM
Multimode (optical) fiber	550m
Network Topology	
Ring topology	Unsupported
Star topology	Support
Bus topology	Support
Tree Topology	Support
Hybrid topology	Support
Electrical Specifications	
Input voltage	DC10-58V
Total Power consumption	<6W
Layer 2 Switching	
Switching capacity	40G
Packet forwarding rate	26.7Mpps
MAC address table	16K
VLAN	4K
Buffer	8M
Forwarding delay	<10us
MDX/MIDX	Support
Flow control	Support
Jumbo Frame	Support 10K Bytes
Environment	




driving fiber innovation

Operating temperature	-40°C ~ +75°C
Storage temperature	-40°C ~ +85°C
Relative humidity	5%~95% non-condensing
Thermal methods	Fanless, natural cooling
MTBF	100,000 hours
Mechanical Dimensions	
Product size	143X104X48mm
Installation Method	DIN rail
Weight	0.58KG around
EMC & Ingress Protection	
IP Level	IP40
Surge protection of Power	IEC 61000-4-5 Level X (6KV/6KV) (8/20us)
Surge protection of Ethernet port	IEC 61000-4-5 Level X (4KV/4KV) (10/700us)
RS	IEC 61000-4-3 Level 3 (10V/m)
EFI	IEC 61000-4-4 Level 3 (1V/2V)
CS	IEC 61000-4-6 Level 3 (10V/m)
PFMF	IEC 61000-4-8 Level 4 (30A/m)
DIP	IEC 61000-4-11 Level 3 (10V)
EMI	CLASS A
ESD	IEC 61000-4-2 Level 4 (8K/15K)
Free fall	0.5m
Authentication	
Authentication	CCC, CE, FCC, RoHS
Accessories	
Accessories	Device, Terminals, Specification, Certificate, power adapter(optional)
Ordering Information	
BSD-IGS3--3408GSFP	4*1000Mbps SFP Port 8*10/100/1000Mbps RJ45 Port

SIZE AND APPEARANCE

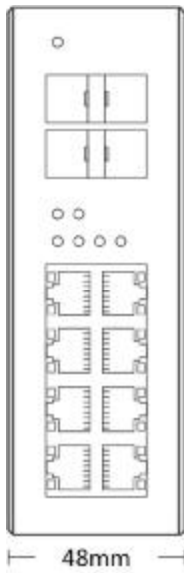

Front view

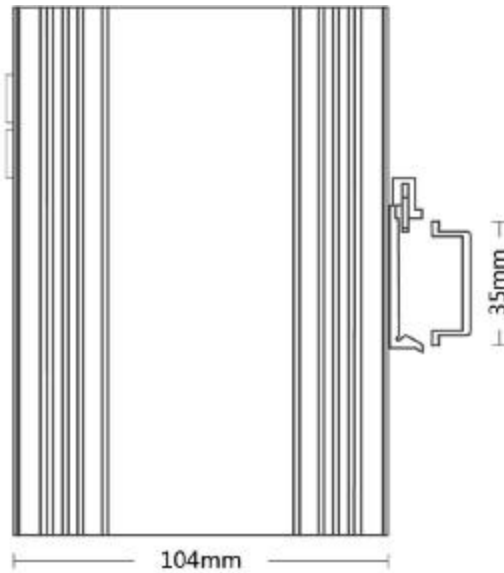

Side view



Back view