




## 12~48VDC Power Input Industrial Gigabit PoE+ Injector

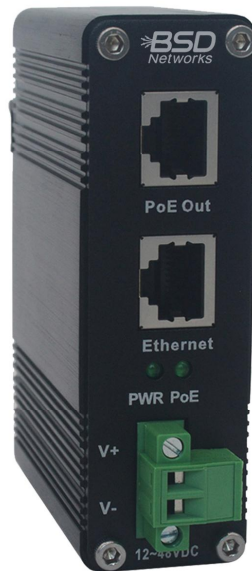

### Model: BSD-IPS300S Series

#### Overview

The BSD-IPS300S product is a Hardened Gigabit High Power PoE Injector allows you to connect the IEEE 802.3 af/at PoE device such as camera and access point with a non PoE LAN switch within the distance of 100m. Both the Ethernet port (to switch) and the PoE Out port (to PoE device) support 10/100/1000Base-T and are compliant with IEEE 802.3ab. The PoE Out port is also compliant with IEEE 802.3 at.

BSD-IPS300S provides an integrated power solution with a wide range voltage of 12~48VDC for high availability applications.




## Features

- 12~48VDC Power Input (supports 24V DC Input)
- 1 RJ45 Ethernet Data Input Port + 1 RJ45 Power Over Ethernet Output Port(Data + Power)
- Support IEEE802.3at Power over Ethernet(PoE+) Power Sourcing Equipment
- Support 10/100/1000Base-TX
- Support DIN-Rail & Wall-mount installation.
- Extensive LED indicators for PoE diagnostics
- Environmentally Hardened -40°C to 80°C (-40°F to 176°F) operating temperature

## Warranty

- 5-Year Warranty

## Typical Application

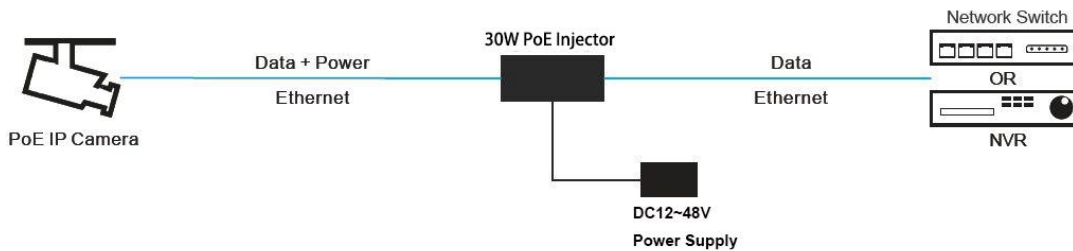



## Technical Indexes

<b>Ethernet</b>	
Standards:	IEEE802.3af Power over Ethernet
	IEEE802.3at Power over Ethernet
Processing Type:	Forward
	Half-duplex, Full-duplex
Forward Filter Rate:	1,488,000pps (1000Mbps)
Cabling:	10/100/1000Base-T: Cat5 or above
Maximum Distance:	Cat5 UTP up to 100m
Connector:	2x RJ45
<b>Environmental</b>	
Operating Temperature:	-40°C to 80°C (-40°F to 176°F)
Storage Temperature:	-40°C to 85°C (-40°F to 185°F)
Relative Humidity:	5% to 95% non-condensing
MTBF:	>200,000hrs
<b>Electrical and Mechanical</b>	
Input Power:	12~48VDC (Terminal Block) (Supports 24V DC Input)
Power Consumption:	36W Max.
<b>PoE (Power over Ethernet)</b>	
Standard:	IEEE802.3af/at
Port:	RJ45
Power Pin Assignment	4/5(+), 7/8(-)
Max. Power per Port:	30W Max per port (Alternative B Mode)
LED Indicators:	
Power:	Power Status
PoE:	PoE Status
Dimensions (WxDxH):	95 x 70 x 30 mm
Weight:	0.25Kg
Casing:	Aluminum Case
Mounting Options:	DIN-Rail / Wall-mount
<b>Regulatory Approvals</b>	
ISO9001	



FCC part 15, Class A
EN55022:2006+A1: 2007 Class A
Surge Protection:
RJ45: 1KV
Power: 500W
ESD: 4KV/8KV

### Ordering Information

Model	Description
BSD-IPS300S	12~48VDC Power Input Industrial Gigabit PoE+ Injector
Mounting Options	▶ Default DIN-Rail Bracket installed, Wall Mount Bracket is included.
Power Options	▶ Power Supply is to be purchased separately